

# INSTALLATION MANUAL

## TITANIUM SERIES



**ALL 1/2" FUEL PORTS  
AND FUEL LINE!**

### APPLICATION:

T D08 220G (220GPH @ 16-18psi)  
T D08 260G (260GPH @ 16-18psi)

Cummins 5.9L 24Valve

1998.5-2004

**\*\*Note: Cab and Chassis  
may require modifications\*\***



**PICKUP**

**FASS<sup>®</sup>**  
Diesel Fuel Systems

**ENGINEERED EXCELLENCE**

Dear Valued Customer,

**“Made in the USA”** is not just a slogan at FASS; it’s what we live by! FASS is not only assembled in the USA but 98%+ of the FASS product is manufactured in the USA, helping to employ Americans and strengthen America. At FASS, we scrutinize our suppliers and demand the highest quality American-made components. However, this does come at a price, which is one of the main reasons FASS products are more expensive than the competition. Remember price does not dictate quality but quality does dictate price! Here at FASS, we believe it’s worth the commitment and will continue this practice to support America! Our competition is doing exactly the opposite by using foreign-made components.

Building extremely “High-Quality” fuel products is our business. We concentrate all of our efforts in this arena. No one else is as specialized as FASS in what we do! This is one of the ingredients to insure you are running with the “Highest-Quality” fuel system in the world! We have implemented very rigorous testing procedures to provide the “Highest Quality” we have become known for. Not only is our product superior, but customer satisfaction is #1 at FASS. It is our goal to provide the best service possible. Our confidence is evident in the products we make as each product is backed by an industry leading warranty!

Our R & D department, in conjunction with our Dealer Support department, is continually searching for ways to improve quality, expand our product line, and provide superb support to our network of dealers so our customers’ needs and expectations will be exceeded.

To help insure you receive the proper system and customer support at the local level, FASS has a VIP and Authorized Dealer network representing FASS products. This is one reason you must purchase through a dealer to comply with our warranty policies. **If you do not, there is no warranty!** We recommend you go to [www.FASSride.com](http://www.FASSride.com), click “Find A Dealer”, put in their ZIP code, select the type of dealer, and see if the company you purchased from is listed. If they are not, put their phone number in the field below the ZIP code field to see if they are listed. Below these two fields is a list of “Terminated/Unauthorized” dealers. You may want to review this list. If the company is not listed or is on the “Terminated/Unauthorized” list, we suggest you return the product immediately to that dealer and call FASS. We’ll recommend you to the nearest dealer.

**VERY IMPORTANT:** Make sure to fill out your product registration form and return the original form to FASS Fuel Systems within 30 days of purchase accompanied with a copy of the purchase receipt. Complying with these guidelines will qualify you for the Extended Warranty!

See the Owner’s Manual online at [www.FASSride.com](http://www.FASSride.com) for full Limitation of Warranty. In the event that the buyer does not agree with this agreement: the buyer may promptly return this product, in a new and unused condition, with a dated receipt, to the place of purchase within thirty (30) days from date of purchase for a full refund less shipping.


**The installation of this product indicates that the buyer has read and understands the Limitation of Warranty agreement and accepts its terms and conditions.**

# !WARNINGS!


- Read all instructions before starting installation of this product!
- Installing the improper FASS Pump can cause *severe* engine damage.

FASS	Recommended Application
<b>T D08 220G</b>	Cummins 1998.5 - 2004 with super extreme horsepower modifications
<b>T D08 260G</b>	Cummins 1998.5 - 2004 with super extreme horsepower modifications

- Secure vehicle from **ROLLING!**
- Cab and Chassis may require modifications
- Consult vehicle's manufacturers' instructions concerning the electrical system before attempting any electrical connections.
- Be sure that the serial # on this installation manual matches that of the outside of the box.



- Flush and clean all brass fittings and fuel line from debris
- Keep debris from entering the internals of the system during installation. Getting debris in the water separator nipple can lock up the motor. If the motor does lock up from debris call FASS for technical assistance.

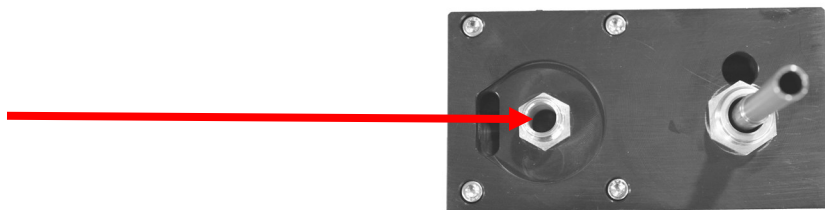

- Wear safety glasses when operating power tools such as drills and grinders or when using a punch or chisel.
- Properly secure lines to prevent chaffing.

# INSTALLATION MANUAL

## Follow these steps to ensure a simple installation of your new FASS TITANIUM FUEL SYSTEM

1. *Read the installation manual completely before attempting installation. The installation of this product indicates that the buyer has read and understands the limitations of the FASS manufacturers warranty agreement and accepts the responsibility of its terms and conditions.*
2. Inventory the package components. Notify the place of purchase immediately of any parts missing or damaged.
3. The installation recommendations contained herein are guidelines. Use good judgment and take into consideration your vehicles' accessories.
4. For best results in accuracy and efficiency (due to training, communication, and our relationship with our dealer network), we recommend a ViP FASS dealer for the installation. They are prepared to install the FASS fuel pumps with the most efficiency. If a situation/problem arises during the installation, they are the most prepared for that situation/problem. DPPI is not responsible for any installation mistakes.
5. If you have any questions or concerns that can not be addressed with your dealer, email or call FASS.
6. If any installation procedure is uncertain, contact FASS technical support.

Email [techsupport@FASSride.com](mailto:techsupport@FASSride.com) with the following information:

- Your Name, address and daytime phone number
- Model **(T D08 220G or T D08 260G)**
- Serial Number
- Last 6 of vehicles' VIN
- Date of purchase
- Nature of Your Concern

Serial # Found Here....



Call customer service; [636-433-5410](tel:636-433-5410) with the following information:

- Model **(T D08 220G or T D08 260G)**
- Serial Number
- Last 6 of vehicles' VIN
- Date of purchase

# TITANIUM SERIES

## 220 OR 260 GPH

### 16-18 PSI (APPROXIMATELY)

A fuel pressure gauge is highly recommended to identify fuel filter life and to prevent engine damage!




## INSTALLATION

- Step 1: Install Electrical Harness
- Step 2: Prepare Suction and Return Lines
- Step 3: Mount Fuel System
- Step 4: Install Fuel Line
- Step 5: Check Installation


# CONTENTS

Owners Manual Available  
for Download at  
[www.FASSride.com](http://www.FASSride.com)

MP-9022

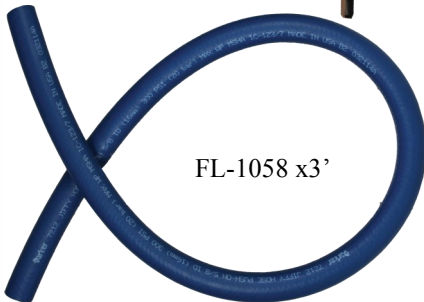

30 amp Fuse

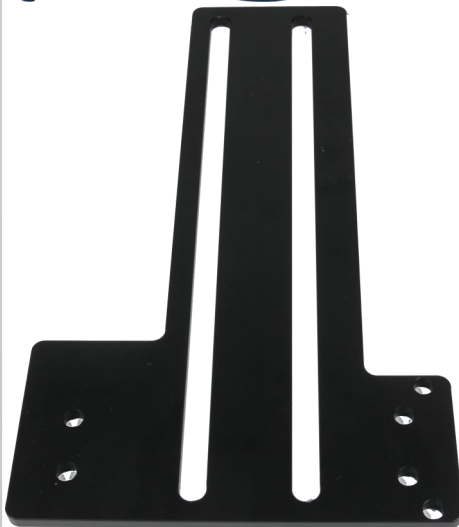

PBR-2001



PFB-2002




FL-1002 x15'

# MOUNTING PACKAGE CONTENTS




BHF-1002

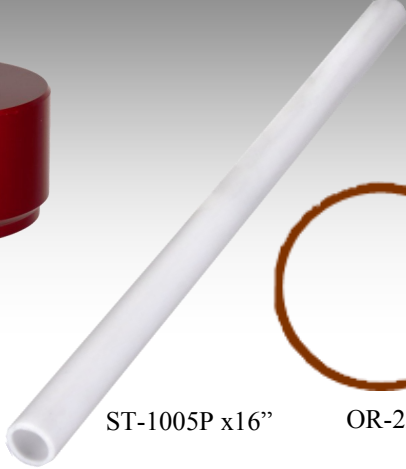

ST-1005P x16"



OR-223




BHN-1001



LW-1001




Ring Terminal



PL-1005



PL-1004



10-302



PL-2003



10-300



DIPF-1003



4 Hex Bolt 3/8" -16x 1 1/2"



3

Hex Bolt 1/4"-20x1 3/4"



4

Locking Nut 3/8"



3

WA-1001D



4


3/8" Washers



PL-1010



PL-1058

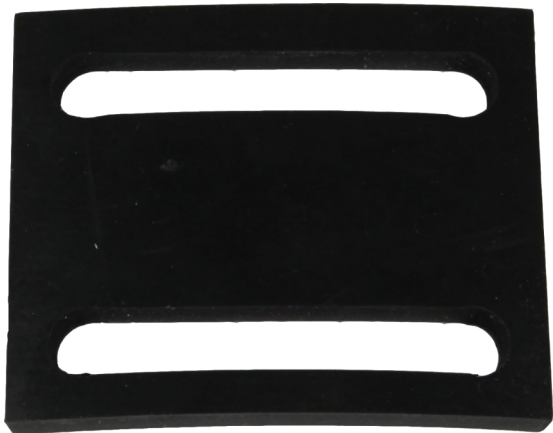

RS-2002




RS-2001

# STEP 1: INSTALL ELECTRICAL HARNESS

The installation of the electrical harness is done first, allowing power to be applied to the pump for lubrication purposes later in the installation.

- A. Using ring terminals, attach red wire of the WH-1005 to the positive battery terminal. Attach green wire to a clean ground, preferably the negative battery terminal. Secure fuse block in a location protected from outside elements. **The use of corrosion preventative spray is recommended.**

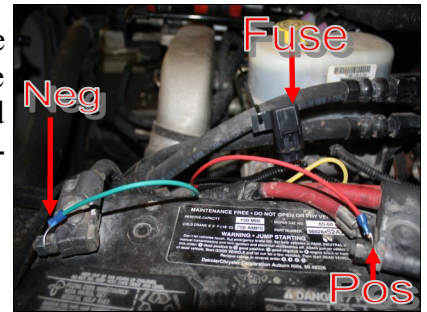


- B. Disconnect power source to the factory lift pump.



- C. Connect the WH-1005 wire harness branch coming from the relay to the factory power source removed in the Step 1b.

- D. Secure Relay in an upright position, as shown, to prevent moisture from entering. Di-electric grease may be applied to prevent corrosion. Examples of locations to secure relay:

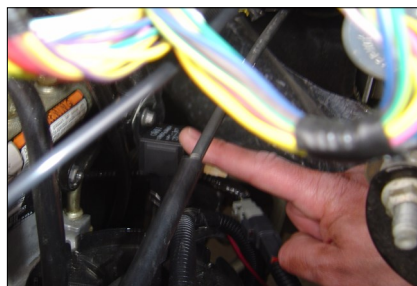

- E. Route the WH-1005 wire harness along the frame rail to the mounting location of the FASS fuel pump.

**Note: The FASS harness provided has a 15 amp fuse and the 30 amp fuse provided loose in the kit is to be installed on the wiring harness due to the volume and torque the FASS pump is producing.**




## STEP 2: PREPARE SUCTION & RETURN LINES

Some of the photo's are of a different application, procedures are the same.


- A. Before tank is removed or moved, identify ALL areas of clearance between the tank and the truck's bed for the best location to install the BHF assembly. With proper clearance, you want to install it as close to the Fuel sending unit as possible.



- B. Remove the filler neck and overflow tubes from the truck by loosening the clamps at both ends.

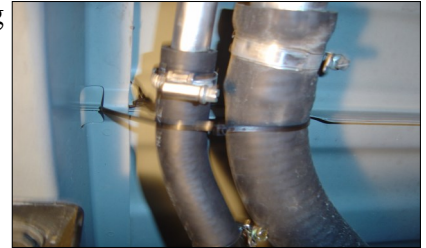


- C. Disconnect the factory suction and return line. The factory lines are removed by pressing in on the two tabs located in the connecting fuel line. Keep the tab on the factory return.

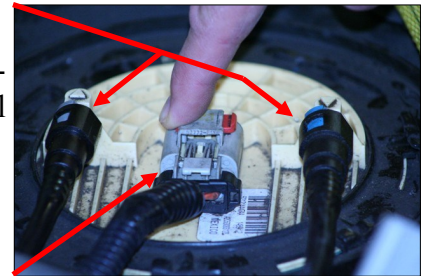


- D. Disconnect the factory electrical harness on top of the fuel tank.

- E. With the fuel tank empty of fuel, remove it from the vehicle.

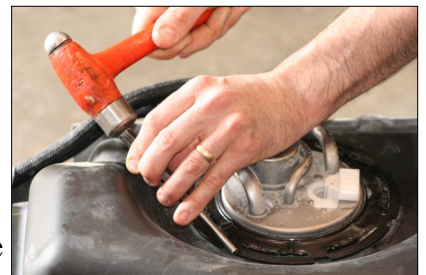

- F. Clean the fuel module area then remove the lock ring on the top of the fuel tank.

- G. Once the lock ring is removed, remove pick up module from fuel tank.

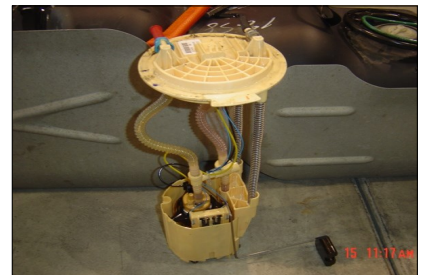


**NOTE: Hose clamps are not recommended for push lock fittings. They will hold up to 300psi! Use oil on fittings and inside fuel line when installing Push-Lok fittings**

- H. Assemble the BHF-1002 with the PL-1010 in port "S" & the PL-1004 in the "R" port using thread tape. Torque to 40 ft./lbs. Push the ST-1005P onto the barb portion of the BHF-1002. Insert O-ring into groove.



## STEP 2: PREPARE SUCTION & RETURN LINES


- I. Before drilling marked location, clean area of debris. Using the photo double and check area selected for any interference including the fuel level arm.

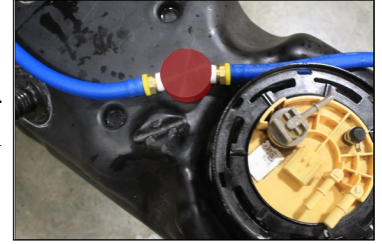

- J. Drill a 1 3/8" hole, catching all debris. De-bur hole and remove any missed debris in the fuel tank.




- K. **VERY IMPORTANT:** Support fuel tank on both ends allowing the natural formation of the tank to take place. Failure to perform this step can and will create an issue with less usable fuel!

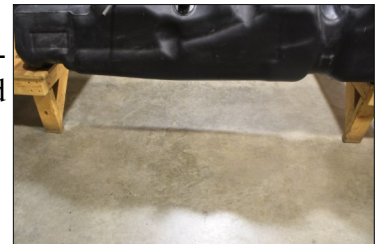

- L. Place the bulk head assembly into the drilled hole, take measurements so the bottom of the suction tube is only 1/8" (no more than 2 quarters stacked) from the bottom of the fuel tank. Using a razor knife, make multiple cuts to insure proper length, it is easy to shave the suction tube with the razor. **It is more efficient to cut the tube too long and then correct to proper length than it would be to cut too short.**



- M. With proper length being obtained, place the assembly into the drilled hole securing the assembly using the lock washer & nut. Tighten Nut. Loctite may be applied to the threads of the BHF-1002 for added insurance.

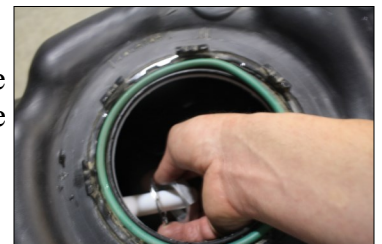

- N. Carefully reinstall install pick up module making sure the leveling arm is not obstructed by the suction tube. Reinstall factory lock ring.



- O. Attach FL-1058 to the Push-Lok PL-1010 fitting to "R" port and FL-1002 to the Push-Lok PL-1004 to "S" port of the BHF-1002. Remember to oil the fitting and fuel line. Route fuel line over frame rail when reinstalling fuel tank.





## **STEP 2: PREPARE SUCTION AND RETURN LINES**

- P. Place the loop of fuel line over the frame rail while reinstalling the fuel tank. Torque tank hanger bolts to proper specifications.
- Q. Reattach filler neck and clamps.



# NOTE




**ATTENTION:** While installing fittings into Titanium pump  
**DO NOT** Apply side pressure to draw  
tube of pump

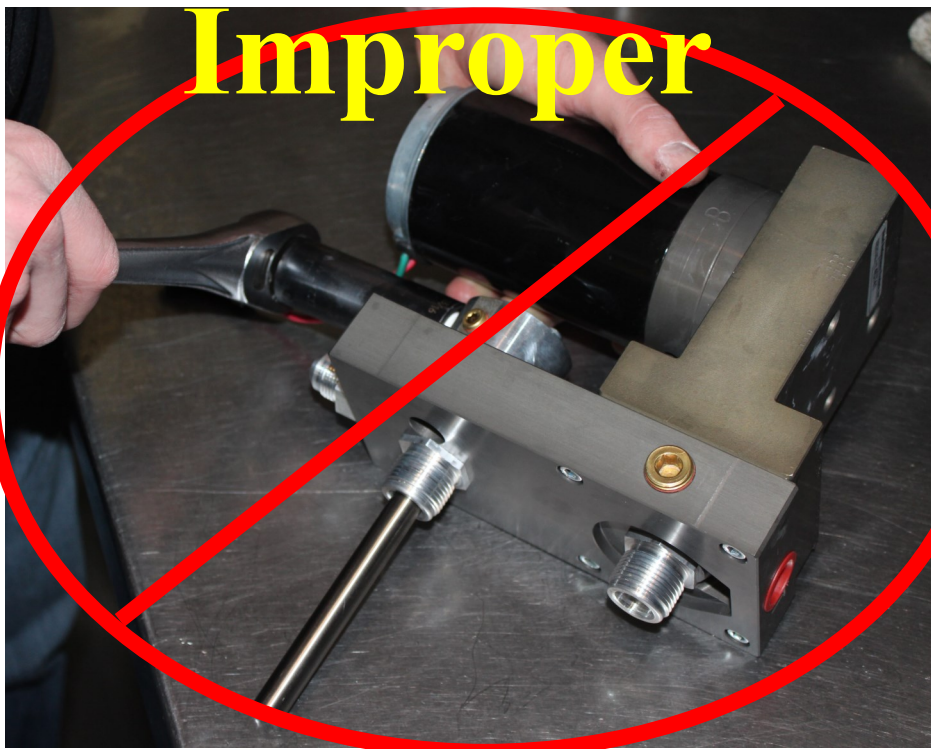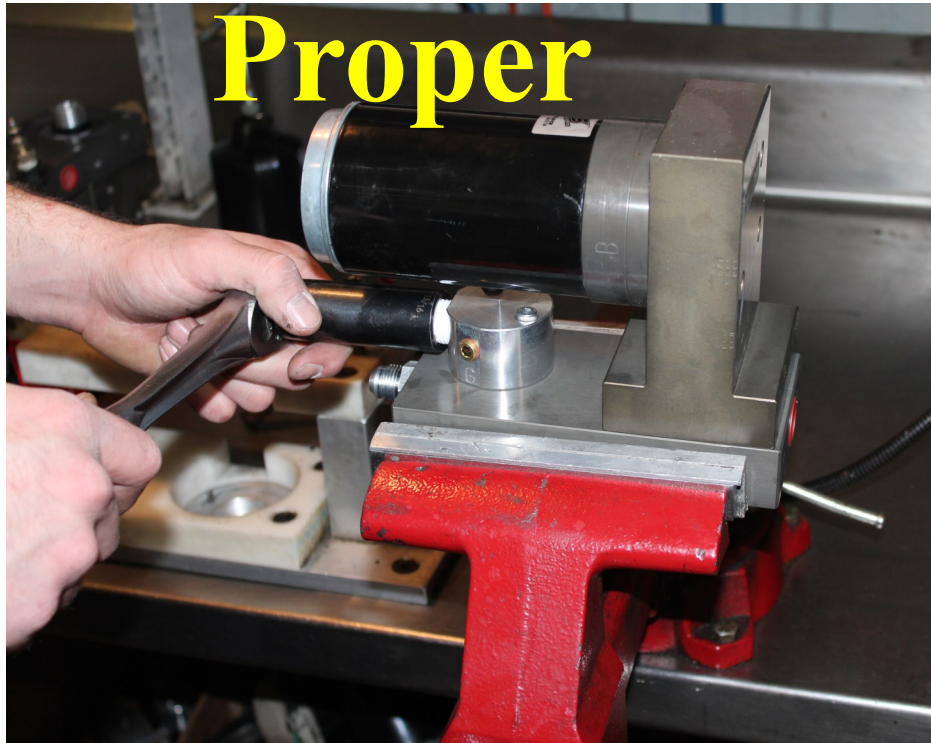



## STEP 3: MOUNT FUEL SYSTEM

**NOTE: Before installing fittings make sure to inspect for burrs or flare imperfections. When cutting fuel line make sure to blow out line to keep debris from moving forward.**

- A. Using thread tape, install the 10-300 into “E” and the 10-302 into the “T” port (on opposite end). Torque to 40 lb./ft.<sup>2</sup> **Note: Do Not Put Thread Tape on Flare of Fitting \*\*\*The use of thread sealant is not recommended\*\*\***

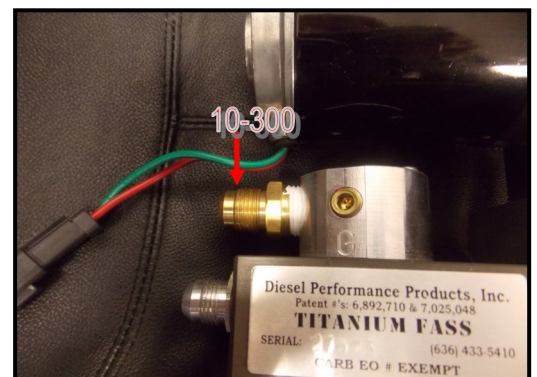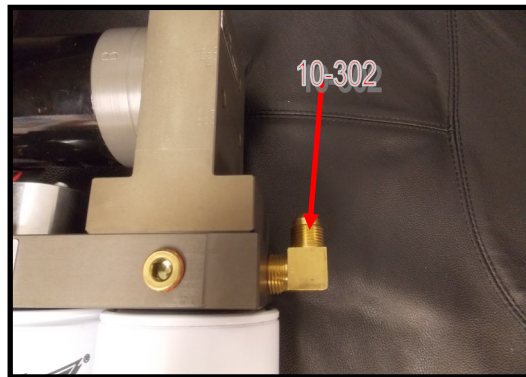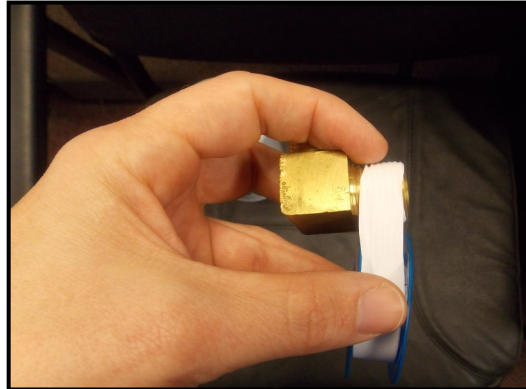

- B. For fitting purposes. Secure PBR-2001 to pump assembly lightly with (3) 1/4"-20x1 3/4 bolts and (3) WA-1001D. This will assembly will be used in future steps for correct fitting of brackets. (**Note: Bracket maybe flipped to accommodate your application.**)

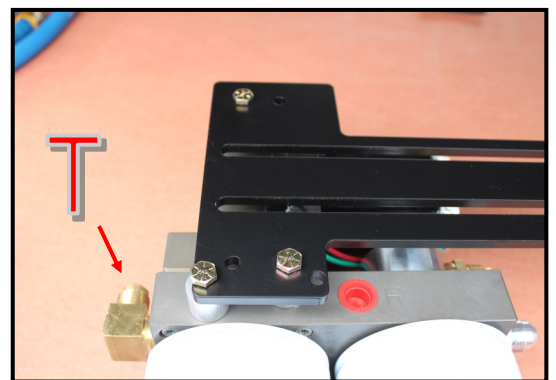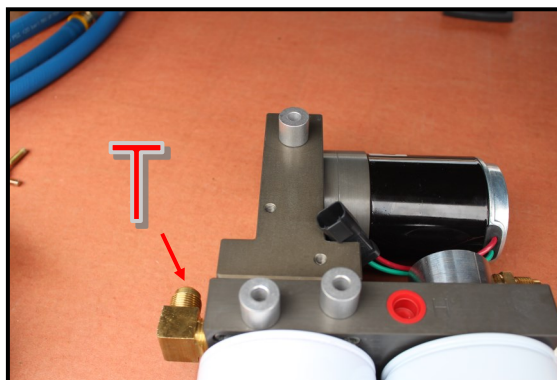

# STEP 3: MOUNT FUEL SYSTEM


- C. Unbolt driver side front bed bolt from bed retain bolt for future use. Align RS-2001 with PFB-2002.



- D. Secure PFB-2002 and RS-2001 with bed bolt in previous step.




- E. Connect factory plug into the FASS harness. Connect female plug of the FASS harness into pump. Turn key to "on". With pump operating (you may have to bump the starter), turn pump over, liberally spray WD-40 (or equivalent) into water separator nipple lubricating Gerotor.

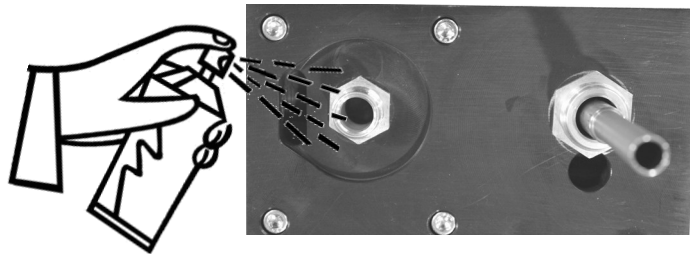


## STEP 3: MOUNT FUEL SYSTEM

- F. Position the PBR-2001 to the PFB-2002 pump assembly at the mounting location and check for fit. Once location is established mark location for mounting in next step.

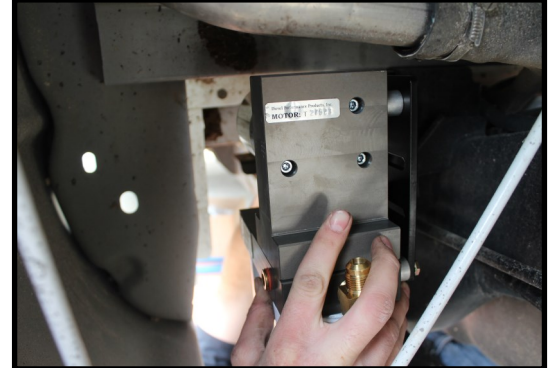


- G. Assemble the FASS pump bracket PBR-2002 using the RS-2002 spacer between PFB-2002 and PBR-2001 bracket with 4-3/8 bolts, nuts, and washers. **Note: Torque bolts not flange nut.**

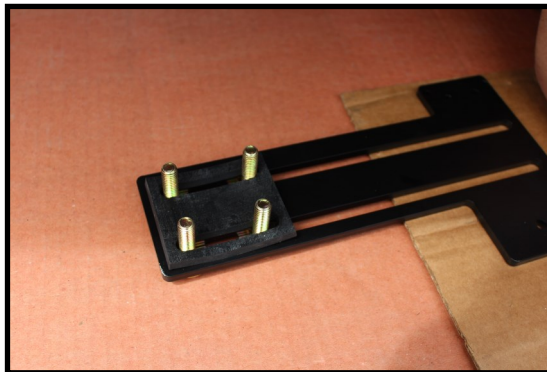

## STEP 3: MOUNT FUEL SYSTEM

- H. Once secure use (3) 1-3/4 bolts and (3) WA-1001D spacers to mount the pump to the bracket.

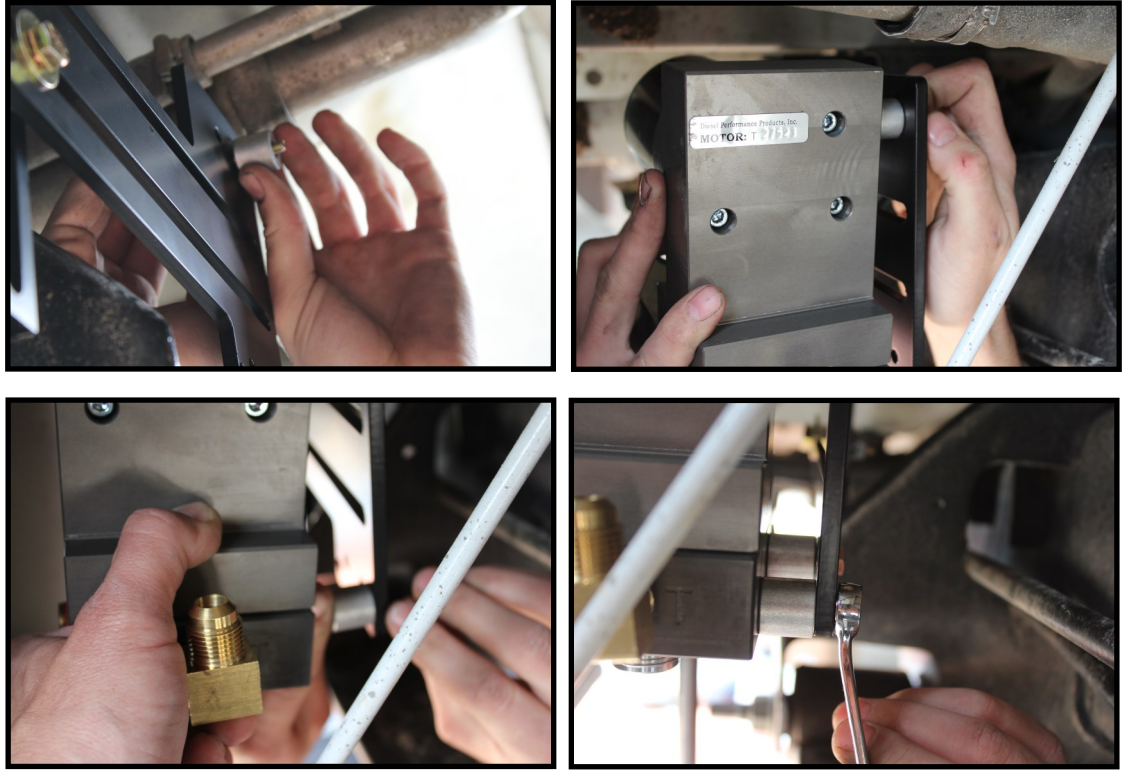

- I. Apply motor oil to gasket located on filters. Attach to system and hand tighten.






## STEP 3: MOUNT FUEL SYSTEM

**Fuel Filter –Install FWS-3003 on side of pump with draw tube in the middle of the filter nipple.**



**Water Separator Filter –Install FS-1001 on water separator nipple without the draw tube. Make sure to insert O-Ring provided on nipple.**

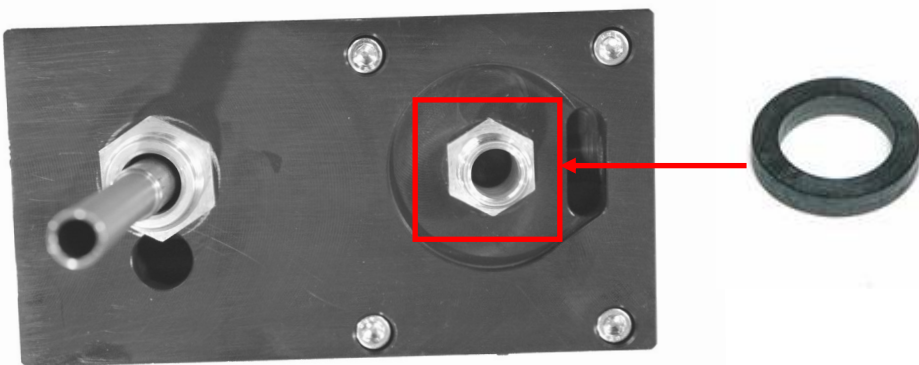

**Note: O-Ring must be put back on suction side of pump. Failure to do so can result in priming issues, cavitation, or pressure losses.**

# STEP 4: INSTALL FUEL LINE



**Caution: Do not use sealant on AN fittings. Only use sealant on threads going into the FASS pump.**

- A. Route suction line from the suction tube assy. to port 'T' on the FASS system. Cut FL-1058 to needed length. Insert PL-1058 using oil. Connect to 10-302 in port 'T'. Torque to 18 ft./lbs.

**NOTE: Hose clamps are not recommended for push lock fittings and can damage the strength of hose. They will hold up to 300psi! Use oil on fittings and inside fuel line when installing Push-Lok fittings**

- B. Route fuel line from the 'R' fitting of the suction tube assembly to the 'R' port on the FASS system with a gentle bend. Cut and insert the PL-1005 fitting to the hose. Use oil. Attach fitting to the 'R' port. Torque to 18 ft./lbs.

- C. Insert PL-1005 in remaining fuel line. Connect to the 'E' port of the FASS system. Use oil. Torque to 18 ft./lbs. Route this line up to the injection pump.

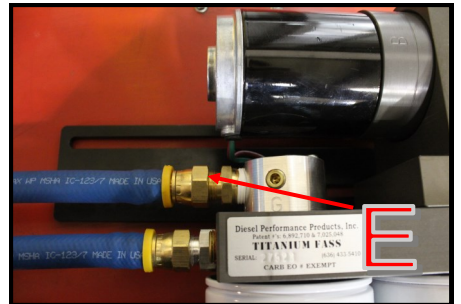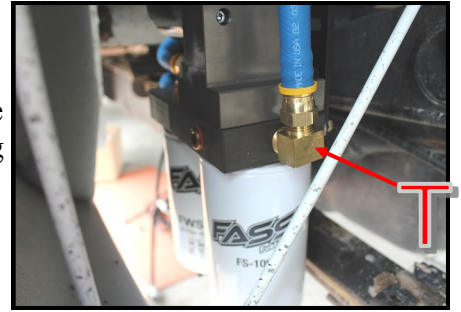

## 2003 - 2004 CP3 (INJECTION PUMP)

- D. Disconnect factory fuel line from inlet side of the factory injection pump, Install the DIPF-1003 fuel fitting into this inlet port. (Note: This is where the suction fuel line from the fuel filter enters the injection pump.)



- E. Measure and cut fuel line. Insert PL-2003 90° Push-Lok fitting using oil. Install fitting onto DIPF-1003. Torque to 18 ft./lbs.



**Note: Secure all fuel lines with cable ties. Cable ties are an economical way to prevent the possibility of problems occurring!**

# **STEP 4: INSTALL FUEL LINE**

## **1998.5 – 2002 VP44 (INJECTION PUMP)**

- D. Disconnect factory fuel line from inlet side of the factory injection pump, Install the DIPF-1003 fuel fitting into this inlet port. (Note: **This is where the suction fuel line from the fuel filter enters the injection pump.**)



- E. Measure and cut fuel line. Insert PL-2003 90° Push-Lok fitting using oil. Install fitting to DIPF-1003. Torque to 18 ft/lbs.



**Note: Secure all fuel lines with cable ties. Cable ties are an economical way to prevent the possibility of problems occurring!**

**The factory suction line can be capped off or removed from the truck. Make sure to drain factory filter. The openings on the filter and tank will need to be capped off to keep debris from getting into lines or canister.**

## **STEP 5: REVIEW INSTALLATION**

- Blow out any open lines/cover any open ports
- Bolts and fasteners properly tightened?
- Electrical harness and fuel lines secured and properly tightened? Reconnect the battery.
- Has the system been primed?
  1. Turn key to the ignition position, turning on the FASS pump for 15 sec..
  2. Crank engine and allow to run for at least 1 minute.
- Check for leaks.
- Start the engine
- Recheck all fluid and filter connections for leaks
- This pump comes with a 1 Year Manufacturer's Warranty based on the date it has been manufactured. To receive your extended Lifetime Warranty, you have 30 days from date of purchase to send the completed warranty information along with a copy of the purchase receipt in to Diesel Performance Products, Inc. Att: Warranty 16240 Hwy O Suite B Marthasville, MO 63357

## **HARD STARTS (DODGE '98.5 - '02)**

Answer the following questions:

- Did the vehicle start fine without the FASS or HPFP? Do you have high mileage on the VP44? If yes, have your VP44 checked. Has the VP44 been subjected to a PSI of 5 or less? Has the VP44 been subjected to a failing lift pump? Does it occur more frequently when the conditions are warm? Have you recently replaced your VP44? Was it used?

**If yes** to any of these questions, Start vehicle as soon as you enter the key (*do not wait for the "wait to start" light to go out*) If the vehicle starts it suggest that the problem lies with the VP44.

- Is the fuel pressure where it should be?
- Has the truck had an ECM re-flash? If not, contact your dealer to find the most current flash for your truck.
- Do you have a WH-1002? If yes, refer to the "WH-1002" section located in "Electrical"

## **STEP 5: REVIEW INSTALLATION**

To assist with priming your FASS pump crack the FWS-3003. Put power to the FASS pump to activate the pump. When the tone of the pump changes you can tighten up the fuel filter. If you need a video of the priming process go to [www.FASSride.com](http://www.FASSride.com).



**Note: The Red Plastic Plugs located in the “H” ports can stay in place fuel will not flow through these ports. Coolant can be plumbed into these ports to heat the fuel in the Winter months.**

## **LIMITATION OF LIFETIME WARRANTY**

**Disclaimer:** To help insure you receive the proper system and customer support at the local level, FASS has a VIP and Authorized Dealer network representing FASS products. This is one reason you must purchase through a dealer to comply with our warranty policies. If you do not, there is no warranty! We recommend you go to [www.FASSride.com](http://www.FASSride.com), click "Find a Dealer", put in their ZIP code, select the type of dealer, and see if the company you purchased from is listed. If they are not, put their phone number in the field below the ZIP code field to see if they are listed. Below these two fields is a list of "Terminated/Unauthorized" dealers. You may want to review this list. If the company is not listed or is on the "Terminated/Unauthorized" list, we suggest you return the product immediately to that dealer and call FASS. We'll recommend you to the nearest dealer.

Diesel Performance Products, Inc. (hereafter "SELLER") gives Limited Warranty as to description, quality, merchantability, fitness for any product's purpose, productiveness, or any other matter of SELLER'S product sold herewith. The SELLER shall be in no way responsible for the product's open use and service and the BUYER hereby waives all rights other than those expressly written herein. This Warranty shall not be extended or varied except by a written instrument signed by SELLER and BUYER.

**When MANUFACTURER receives the "ORIGINAL" PRODUCT REGISTRATION form with a copy of the "BILL OF SALE/SALES RECEIPT" within 30 days of the sale, then the following applies!** The Warranty will then and only then be validated to that of which typically accompanies your unit for your specific application from the date of sale or for recommended service life and limited solely to the original purchaser and/or vehicle and parts contained within the product's kit. This warranty does not cover normal wear on consumable items such as but not limited to filters, fuel line, wire harness & etc. The warranty does not cover seized gears due to lack of filtration. Warranty is voided if used with other than diesel fuel. Returned items will arrive prepaid to the place of purchase. Diesel Performance Products, Inc. will repair, without cost, any product found to be defective during the warranty period; parts only, or at its option, will replace such products in exchange for the product. Repair or replacements are warranted for the remainder of the original warranty period. All Warranty claims are subject to approval by Diesel Performance Products, Inc.

**A Return Material Authorization (RMA) number must be obtained before any product is to be returned to Diesel Performance Products, Inc. for warranty consideration, repair or product return.** Requests for product returns must be offset by an equal value order. Return parts must be completed and in resalable condition. No returns after 30 days.

The following information is required to obtain a RMA number before returning product:

Your Name, Address, and Phone Number's  
Model and Serial Number (Not Motor Number) Example: Model HD Series, Serial: 00125966  
VIN Number of Vehicle  
Date of Purchase  
Nature of Problem

RMA and Product Serial Number must be on all paperwork and correspondence. Failure to obtain the required information or paperwork will result in \$25.00/item penalty and delay or denial of any warranty claim.

Under no circumstances shall the SELLER and/or MANUFACTURER be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or reinstallation of this product, or any other contingent expenses.

Under no circumstances shall the SELLER and/or MANUFACTURER be liable for any damage or expenses insured by reason of the use or sale of any such equipment. This warranty does not apply to products which Diesel Performance Products, Inc. has determined to have been misused or abused, improperly maintained by the user, or where the malfunction or defect can be attributed to the use of non-genuine Diesel Performance Products, Inc. parts.

**IN THE EVENT THAT THE BUYER DOES NOT AGREE WITH THIS AGREEMENT: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT, IN A NEW AND UNUSED CONDITION, WITH A DATED PROOF OF PURCHASE, TO THE PLACE OF PURCHASE WITHIN THIRTY (30) DAYS FROM DATE OF PURCHASE FOR A FULL REFUND LESS SHIPPING.**

**THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTANDS THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.**

Technical Support:

Diesel Performance Products, Inc.  
16240 State Hwy O Suite B  
Marthasville, MO 63357  
636-433-5410

# NOTES